

www.jinkosolar.com



TIGER Neo

48HL4M-BDV

445-470 Watt

BIFACIAL MODULE WITH DUAL GLASS

N-type



N-type Technology

N-type modules with Tunnel Oxide Passivating Contacts (TOPCon) technology offer lower LID/LeTID degradation and better low light performance.



HOT 3.0 Technology

N-type modules with JinkoSolar's HOT 3.0 technology offer better reliability and efficiency.



Dual-Sided Power Generation

Dual-sided power generation gain increases with backside exposure to light, significantly reducing LCOE.



Mechanical Load Enhanced

Certified to withstand:
6000 Pa front side max static test load
4000 Pa rear side max static test load




SMBB Technology

Better light trapping and current collection to improve module power output and reliability.



Anti-PID Guarantee

Minimizes the chance of degradation caused by PID phenomena through optimization of cell production technology and material control.

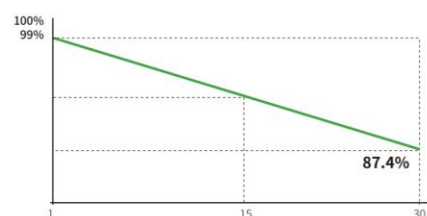

15 Year
Product Warranty

30 Year
Linear Power Warranty

1%
First-year Degradation

0.40%
Annual Degradation Over 30 Years

- IEC61215:2021 / IEC61730:2023
- IEC61701 / IEC62716 / IEC60068 / IEC62804
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management systems



POSITIVE QUALITY™
Continuous Quality Assurance

JKM445-470N-48HL4M-BDV-Z2-EU

48HL4M-BDV 445-470 Watt

Mechanical Characteristics

Cell Type	N- type Mono-crystalline
No. of cells	96 (48×2)
Dimensions	1762×1134×30 mm
Weight	24.0 kg
Front Glass	2.0 mm, Anti-reflection Coating
Back Glass	2.0 mm, Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Protection Class	Class II
IEC Fire Type	Class C
Connector Type	JK03M/JK03M2/Others*
Output Cables (Including Connector)	4.0 mm ² (+): 400 mm , (-): 200 mm or Customized Length

* MC4 and MC4-EVO2 available upon request and subject to availability

Packaging Configuration

Pallet Dimensions	1792×1140×1249 mm
Packing Detail (Two pallets = One stack)	37 pcs/pallets, 74 pcs/stack, 962 pcs/ 40'HQ Container

Specifications (STC)

Maximum Power - Pmax [Wp]	445	450	455	460	465	470
Maximum Power Voltage - Vmp [V]	30.30	30.53	30.77	31.00	31.23	31.46
Maximum Power Current - Imp [A]	14.69	14.74	14.79	14.84	14.89	14.94
Open-circuit Voltage - Voc [V]	36.02	36.19	36.36	36.53	36.70	36.87
Short-circuit Current - Isc [A]	15.60	15.65	15.70	15.75	15.80	15.85
Module Efficiency STC [%]	22.27	22.52	22.77	23.02	23.27	23.52
Power Sorting	0 ~ + 3 %					
Temperature Coefficient of Pmax	-0.29 %/°C					
Temperature Coefficient of Voc	-0.25 %/°C					
Temperature Coefficient of Isc	0.045 %/°C					

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

Specifications (BNPI)

Maximum Power - Pmax [Wp]	489	494	500	505	511	516
Maximum Power Voltage - Vmp [V]	30.30	30.53	30.77	31.00	31.23	31.46
Maximum Power Current - Imp [A]	16.13	16.18	16.24	16.29	16.35	16.40
Open-circuit Voltage - Voc [V]	36.02	36.19	36.36	36.53	36.70	36.87
Short-circuit Current - Isc [A]	17.13	17.18	17.24	17.29	17.35	17.40

BNPI: Irradiance: front 1000W/m², rear 135W/m², Cell Temperature 25°C, AM=1.5

Application Conditions

Operating Temperature	-40 °C ~ +70 °C
Maximum System Voltage	1500 VDC (IEC)
Maximum Series Fuse Rating	35 A
Bifaciality Coefficients	φVoc: 98±5 %, φIsc: 80±5 %, φPmax: 80±5 %



© 2025 Jinko Solar Co., Ltd. All rights reserved.


Note: Please read the safety and installation manual before using the product. We reserve the right of final interpretation. The specifications in this datasheet are subject to change without notice.

Approved and accepted,
The Seller: **Jinko Solar Co., Ltd.**
Representative: **Mr. Miao Gen**

Signature: _____
The Buyer: **SOLARITY UKRAINE LLC**
Representative: **Michal Adrian**



Signature: _____

Engineering Drawings

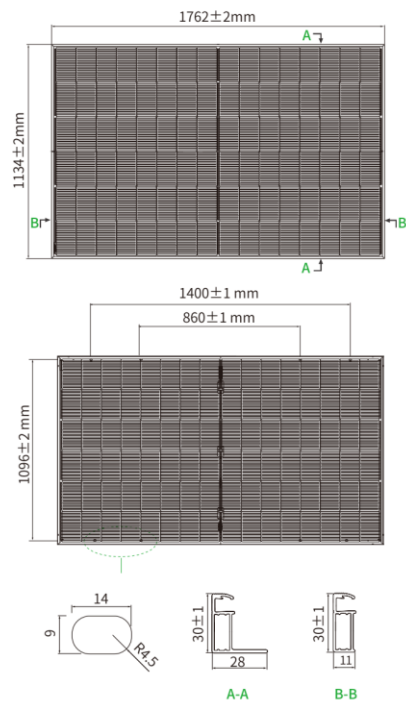

*Note: For specific dimensions and tolerance ranges, please refer to the corresponding detailed module drawings.

Electrical Performance

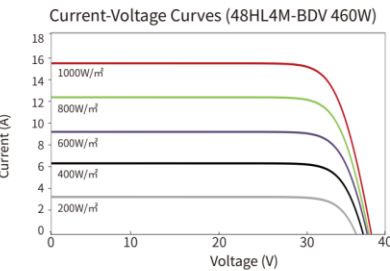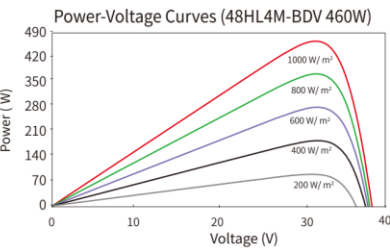

JKM445-470N-48HL4M-BDV-Z2-EU

www.jinkosolar.com
www.jinkosolar.eu

Погоджено і затверджено,
Продавець: **Jinko Solar Co., Ltd.**
Представник: **Mr. Miao Gen**

Підпис: _____
Покупець: **ТОВ "СОЛАРІТІ УКРАЇНА"**
Представник: **Міхал Адріан**

Підпис: _____